


POSH STEENBOK

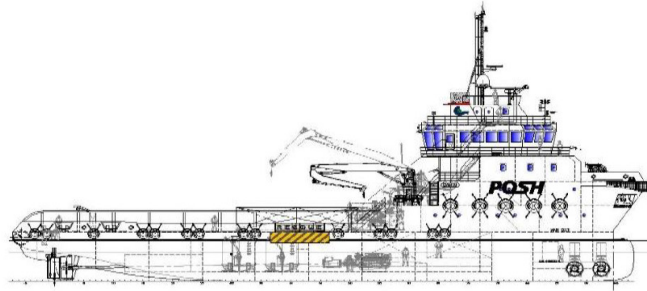

5,150 BHP / 60 TBP / AHTSS **Call Sign: 9V5363**

Class Notation +A1 Offshore Support Vessel (AH-TOW, Supply-HNLS, OSR-C2, FFV1), (E), +AMS, + ACCU, SPS, MLC-ACCOM, ENVIRO, UWILD, RW

Principal Particulars		Main Engines & Generators	
Flag	Singapore	Main Engines	2 x Caterpillar 3516C 1,920 kW each (Total 5,150 HP)
Year Built	2017	Generators	2 x Caterpillar C18, 350kW each and 1 x Caterpillar C4.4
Place Built	Paxocean Engineering Zhuhai Co Ltd	Shaft Generators	2 x 1,500kW
Design Draft	3.20 m	Emergency Generator	94kW
Max Summer Draft	4.60 m	Thrusters & Propulsion	
Gross Tonnage	2252 T	Bow Thrusters	2 x 550kW transverse tunnel type
Net Tonnage	675 T	Propeller	2 x CP propeller in fixed nozzles
Deadweight (Max Draft)	2,458 T	Deck Crane	
Displacement	4,208	Fixed Crane	1 x electro-hydraulic knuckle crane SWL 3.0 T @16m radius
IMO No.	9830329	Anchor Handling/Tow Equipment	
Design	64m Conan Wu Design Anchor Handling / Supply Vessel	Tow/Anchor Handling Winch	1 x hydraulic waterfall type
Dimensions		Line Pull Capacity	150.0 T
Length Overall	64.00 m	Brake Holding Capacity	200.0 T
Beam Overall	18.50 m	Tow Drum Capacity	600 m x 56 mm dia. wire
Depth Moulded	5.60 m	Anchor Handling Capacity	100 m x 56 mm dia. wire
Performance		Storage Reel Capacity	600 m x 56 mm dia. wire
Max Speed	12.00 kts	Tugger Winch	2 x 10.0 T each
Economical Speed	10.00 kts	Capstan	2 x 5.0 T each
* Subject to actual weather and operating conditions			
Cargo Deck		Shark Jaws	1 x SWL 200.0 T
Deck Cargo Area	400.0 m ²	Tow Pins	1 x SWL 200.0 T
Deck Cargo Dimension	27.6 m x 14 m	Stern Roller	6.20 m x 1.50 m diameter, SWL 200.0 T
Deck Cargo Capacity	800.0 T	Tow/Anchor Handling Wires	
Deck Strength	5.0 T/m ²	Main Tow Wire	600.0 m x 56.0 mm dia wire
Reefer Points	2 x 50 Amp, 440/3/60 & 2 x 50 Amp, 220/3/60	Spare Tow Wire	600.0 m x 56.0 mm dia wire
Capacities		Anchor Handling Wire	100.0 m x 56.0 mm dia wire
Fuel Tank	428 m ³	Mooring Equipment	
Fresh Water	325 m ³	Anchor	2 x stockless each TBC kg
Drill Water *	986 m ³	Anchor Chain	2 x 12 shackles x 38 mm dia Grade 3 stud link chains
Base Oil*	0 m ³	Anchor Windlass	9.0 T @ 0-9 m/min
Mud Tank*	261 m ³	Fire Fighting and Rescue	
Brine Tank*	261 m ³	Firefighting System	FiFi 1
Dry Bulk Tank	113.0 m ³ (4 tanks)	FiFi Pump	2 x 1,780 m ³ /hr each
Oil Recovery*	261 m ³	FiFi Monitors	2 x 1,200.0 m ³ /hr each (water) / 2 x 300 m ³ /hr each (foam)
* Indicates tanks with shared capacity			
Discharging Rates		Spray Booms	2 x 12m each side
Drill Water/Pump	1 x 100 m ³ /hr @ 10 bar	Dispersant Capacity	17.7 m ³
Fresh Water/Pump	1 x 100 m ³ /hr @ 10 bar	Foam Capacity	21.3 m ³
Fuel/Pump	1 x 100 m ³ /hr @ 10 bar	Rescue Boat	1 x 9-man
Brine/Pump	1 x 70 m ³ /hr @ 7 bar	Life Rafts	4 x 25-man
Liquid Mud/Pump	1 x 70 m ³ /hr @ 7 bar	Life Buoys	10
Dry Bulk Tank	2 x 50 m ³ /hr @ 5.6 bar	Life Jackets	35
Accommodation			
1 – Berth Cabins	7		
2 – Berth Cabins	7		
4 – Berth Cabins	1		
Total (POB)	25		

